



WIRELESS BACKHAUL

**CELLULAR REPEATERS/
SIGNAL BOOSTERS**

**ENTERPRISE/CARRIER-CLASS
WI-FI ACCESS POINTS**


SATELLITE RADIO

AUTOMOTIVE

INFRASTRUCTURE/DAS

DEFENSE/GPS

RF TEST

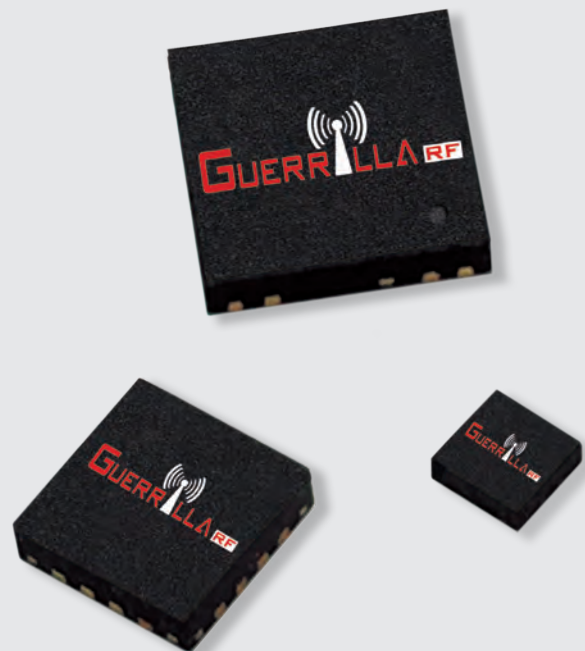

Making Better Networks


Product Selection Guide: Summer 2018



FEATURED PRODUCTS

NEW! GRF7001 Up/Downconverter with Integrated LO Buffer

Tuning Range: 0.7 – 2.7 GHz

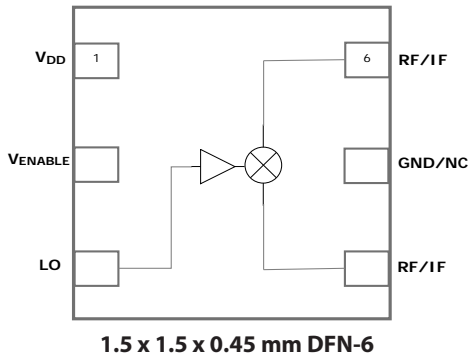

Applications


- Transmit/Receive Mixer for Linear, Low Power Applications

Features

- Integrated LO Buffer
- Broadband Tuning
- Low Power Consumption

GRF2013 Broadband High Linearity Gain Block

Tuning Range: 0.05 – 8.0 GHz

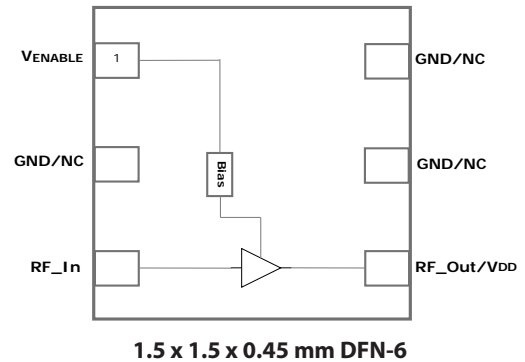

Applications

- Linear Driver
- IF Amplifier
- LNA

Features

- Low Noise Figure
- Flat Gain
- Flexible Bias Voltage and Current
- Internally Matched to 50 Ω

Part Number	Reference	Gain (dB)	OP1dB (dBm)	OIP3 (dBm)	Noise Figure (dB)
GRF7001*	3 V/10 mA/RF: 800 MHz; Lo: 965 MHz; IF: 165 MHz	-6.0	>23.0	30.0	7.0
GRF2013	5 V/90 mA/1.9 GHz 3 V/35 mA/400 MHz	18.5 20.5	22.5 17.5	38.5 30.5	1.3 1.3
GRF5511	5 V/130 mA/2.5 GHz 5 V/100 mA/5.5 GHz	20.1 15.4	26.0 25.8	39.6 44.0	1.5 1.7
GRF2133	5 V/60 mA/700 MHz 5 V/60 mA/1950 MHz	40.0 28.0	20.0 20.0	31.0 31.0	0.7 0.6

* Sampling now, production Q3 2018.


Subscribe

to Guerrilla RF News

Sign up today to receive Guerrilla RF product and industry updates to your inbox. Be in-the-know about our newest opportunities, insights, industry tips and trends affecting your business. Unsubscribe at any time.

GRF5511 High Frequency Power-LNA™

Tuning Range: 0.7 – 6.0 GHz

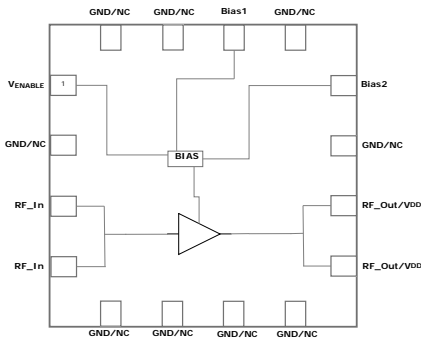

3.0 x 3.0 x 0.85 mm QFN-16

Applications


- PA/Driver for 802.11ac
- Linear Driver Amplifier for High PAR Waveforms
- Microwave Backhaul

Features

- Flexible Bias Voltage and Current
- Outstanding Gain and Linearity to 6 GHz

GRF2133 Ultra-High Gain LNA

Tuning Range: 0.1 – 2.7 GHz

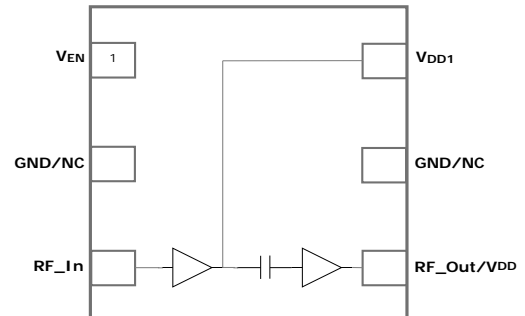

1.5 x 1.5 x 0.45 mm DFN-6

Applications

- Cellular Boosters / Repeaters
- Linear Driver Amplifier

Features

- Internally Matched
- Unconditionally Stable
- Flexible Bias Voltage and Current

Contents

Featured Products.....	2	Linear PAs/Power-LNAs™.....	9
Broadband Linear LNAs/Drivers.....	4	Guerrilla Bloc™ Technology.....	10
Low Current LNAs/Drivers for General Purpose.....	5	Fully Integrated Ultra-Low Noise Amplifier, Driver and PA Modules.....	10
LNAs/Drivers with Bypass/Failsafe Bypass.....	5	Automotive Qualified (AEC-Q100) Products.....	11
DFN-6 Package Portfolio with Common Pin Out.....	6	Standard and Automotive Product Processes.....	11
WLAN LNAs/Drivers.....	7	AEC-Q100 Qualification Schedule.....	11
High Frequency Gain Blocks/LNAs: 10 MHz to X-Band.....	7	Sales Representatives.....	12
Up/Downconverter with Integrated LO Buffer.....	8	Distributors.....	13
Failsafe SPDT Switch.....	8	Part Number Index.....	14
Ultra-LNAs™.....	8		

Broadband Linear LNAs/Drivers

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVN NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF2105	0.4 - 5.0	2.5 GHz 5.0 V; 70 mA	20.5	0.75	22.5	37.0	2.7 - 5.0	20 - 90	1.5 x 1.5 x 0.45 DFN-6	Enhanced gain flatness
GRF2133	0.1 - 6.0	1.9 GHz 5.0 V; 60 mA	28.5	0.65	20.0	31.0	1.8 - 5.0	35 - 120	1.5 x 1.5 x 0.45 DFN-6	Ultra-high gain/ flexible bias
GRF4001	0.1 - 5.0	2.5 GHz 3.3 V; 45 mA	15.5	0.90	16.5	30.5	1.8 - 5.0	15 - 50	1.5 x 1.5 x 0.45 DFN-6	Internal match/ flexible bias
GRF4002	0.1 - 3.8	1.9 GHz 5.0 V; 70 mA	17.5	0.80	23.5	36.0	1.8 - 5.0	20 - 80	1.5 x 1.5 x 0.45 DFN-6	Internal match/ flexible bias
GRF4003	0.1 - 3.8	1.9 GHz 5.0 V; 95 mA	15.0	0.80	24.5	41.0	1.8 - 5.0	20 - 120	1.5 x 1.5 x 0.45 DFN-6	Internal match/ flexible bias
GRF4004	0.1 - 3.8	1.9 GHz 5.0 V; 135 mA	14.5	0.85	26.0	43.0	1.8 - 5.0	30 - 150	1.5 x 1.5 x 0.45 DFN-6	Minimal matching/ flexible bias
GRF4005	0.1 - 3.8	1.9 GHz 5.0 V; 170 mA	15.0	0.80	26.5	42.0	1.8 - 5.0	50 - 200	1.5 x 1.5 x 0.45 DFN-6	Minimal matching/ flexible bias
GRF4014	0.1 - 6.0	2.5 GHz 5.0 V; 60 mA	16.5	0.80	24.3	39.0	2.7 - 8.0	30 - 120	1.5 x 1.5 x 0.45 DFN-6	Power/low noise; flexible bias

Low Current LNAs/Drivers for General Purpose

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVN NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF2100	0.1 - 3.8	2.5 GHz 3.3 V; 15 mA	16.5	0.8	10.0	19.0	1.8 - 5.0	8 - 30	1.5 x 1.5 x 0.45 DFN-6	Flexible bias standard pinout
GRF2106	0.1 - 4.2	2.5 GHz 3.3 V; 15 mA	20.5	0.8	12.0	26.0	2.7 - 5.0	8 - 30	1.5 x 1.5 x 0.45 DFN-6	Flexible bias standard pinout
GRF2373	0.1 - 3.8	1.9 GHz 3.3 V; 15 mA	18.5	1.2	12.5	25.0	2.7 - 5.0	10 - 25	1.5 x 1.5 x 0.45 DFN-6	Flexible bias standard pinout

LNAs/Drivers with Bypass/Failsafe Bypass

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVN NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF2077*	0.7 - 3.8	2.5 GHz 5.0 V; 70 mA	17.0	0.90	22.0	40.0	2.7 - 5.0	20 - 90	2.0 x 2.0 x 0.75 DFN-8	Failsafe bypass
GRF2140	0.1 - 3.8	1.9 GHz 3.3 V; 15 mA	18.0	1.1	9.0	20.0	1.8 - 5.0	8 - 30	1.5 x 1.5 x 0.45 DFN-6	Low loss bypass; standard pinout
GRF2374	0.1 - 4.2	1.9 GHz 3.3 V; 15 mA	16.5	1.3	10.0	22.0	2.7 - 5.0	8 - 30	1.5 x 1.5 x 0.45 DFN-6	Low loss bypass; standard pinout
GRF4042	0.1 - 3.8	1.9 GHz 5.0 V; 70 mA	16.0	1.0	22.0	36.0	1.8 - 5.0	15 - 80	2.0 x 2.0 x 0.50 QFN-12	Low loss bypass; standard pinout
GRF4142	0.1 - 3.8	1.9 GHz 3.3 V; 50 mA	15.3	0.9	19.5	33.0	1.8 - 5.0	15 - 80	1.5 x 1.5 x 0.45 DFN-6	Low loss bypass; standard pinout

* Pre-production, sampling now.


DFN-6 Package Portfolio with Common Pin Out

Guerrilla RF's DFN-6 package product portfolio includes a wide range of gain, linearity, NF and bypass capability using a single layout. This rapidly growing family effectively creates a modular RF design system, including single-stage, two-stage, bypass and failsafe bypass devices.

DFN-6 Package Product Portfolio

Part Number	Product Description
GRF2003, GRF2004	Broadband Gain Block to X-Band
GRF2012, GRF2013, GRF2014	Flat Gain, High Linearity Gain Block
GRF2100	Low NF, Low Current Amplifier
GRF2105	Broadband, Linear LNA
GRF2106, GRF2133*	Ultra-high Gain, Low NF Amplifier
GRF2140	Low NF, Low Current Amplifier with Bypass
GRF2373	High Gain, Low Noise, Linear Driver
GRF2374	High Gain, Low Noise, Linear Driver with Bypass
GRF2505	High Linearity, Low Noise Driver
GRF4001	Broadband LNA/Linear Driver
GRF4002, GRF4003, GRF4004, GRF4005, GRF4014	Broadband LNA/High Linearity Driver
GRF4142	Broadband LNA/High Linearity Driver with Bypass

* Pin 6: NC/GND except for GRF2133 (Pin 6: Vdd2).

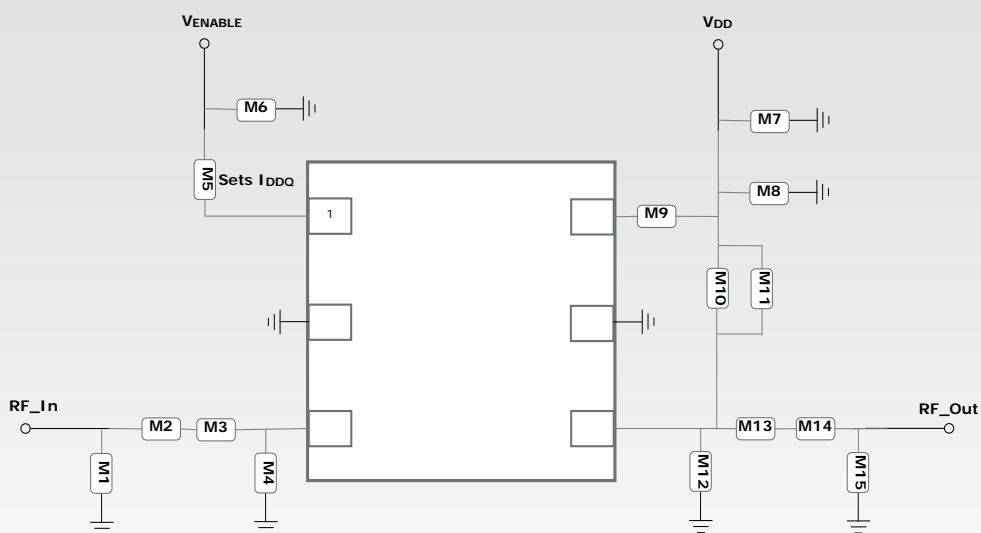

Generic Schematic

WLAN LNAs/Drivers

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVB NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF2101	4.0 - 7.0	5.5 GHz 3.3 V; 18 mA	18.0	0.90	10.0	22.0	2.7 - 5.0	10 - 30	1.5 x 1.5 x 0.45 DFN-6	High gain; low noise
GRF2201	0.4 - 3.8	2.45 GHz 3.3 V; 15 mA	20.5	0.80	12.0	26.0	2.7 - 5.0	10 - 30	1.5 x 1.5 x 0.45 DFN-6	High gain; low noise
GRF2501	4.9 - 6.0	5.5 GHz 3.3 V; 15 mA	16.0	1.0	7.0	18.0	2.7 - 5.0	10 - 30	1.5 x 1.5 x 0.45 DFN-6	High gain; low noise
GRF2505	4.0 - 6.0	5.5 GHz 5.0 V; 40 mA	12.5	1.2	19.0	30.0	2.7 - 5.0	15 - 50	1.5 x 1.5 x 0.45 DFN-6	High linearity; low noise
GRF2541	4.9 - 6.0	5.5 GHz 3.3 V; 18 mA	16.0	1.2	5.0	16.0	2.7 - 5.0	10 - 30	1.5 x 1.5 x 0.45 DFN-6	High gain; low noise; bypass
GRF2543*	4.9 - 6.0	5.5 GHz 3.3 V; 15 mA	14.5	1.0	12.5	25.5	2.7 - 5.0	10 - 30	1.5 x 1.5 x 0.45 DFN-6	High gain, low noise, bypass

* Pre-production, sampling now.

High Frequency Gain Blocks/LNAs: 10 MHz to X-Band

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVB NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF2012	0.05 - 3.8	0.9 GHz 5.0 V; 90 mA	14.8	2.7	23.0	40.0	2.7 - 5.0	15 - 100	1.5 x 1.5 x 0.45 DFN-6	Flat gain; high linearity
GRF2013	0.05 - 5.0	1.9 GHz 5.0 V; 90 mA	18.5	1.3	22.5	38.5	2.7 - 5.0	15 - 100	1.5 x 1.5 x 0.45 DFN-6	Flat gain; high linearity, low NF
GRF2014	0.05 - 3.8	0.9 GHz 5.0 V; 150 mA	15.9	3.4	24.0	43.5	2.7 - 5.0	50 - 180	1.5 x 1.5 x 0.45 DFN-6	Flat gain; high linearity
GRF2003	0.05 - 10.0	5.5 GHz 5.0 V; 55 mA	12.0	3.8	15.0	29.0	3.0 - 5.0	40 - 80	1.5 x 1.5 x 0.45 DFN-6	Flat gain; internal match
GRF2004	0.05 - 10.0	4.0 GHz 5.0 V; 100 mA	16.5	1.9	18.0	31.0	3.0 - 5.0	60 - 120	1.5 x 1.5 x 0.45 DFN-6	Flat gain; internal match
GRF2710	8.0 - 13.0	11 GHz; 5.0 V; 25 mA	13.9	2.1	13.0	21.0	3.0 - 8.0	20 - 40	1.5 x 1.5 x 0.45 DFN-6	High gain; low noise; flexible bias
GRF3042	0.01 - 13.0	4.0 GHz 45 mA	14.3	3.0	14.0	26.0	≥ 7.0	35 - 60	1.5 x 1.5 x 0.45 DFN-6	Flat gain; internal match
GRF3044	0.01 - 120	4.0 GHz 100 mA	16.6	1.8	19.8	31.5	≥ 7.0	60 - 120	1.5 x 1.5 x 0.45 DFN-6	Flat gain; internal match

Up/Downconverter with Integrated LO Buffer

Part Number	RF/IF (GHz)	LO (GHz)	LO Drive (dBm)	Typ. Conv. Loss (dB)	Typ. IP1dB (dBm)	Typ. IIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF7001*	0.1 - 5.0	0.1 - 4.0	0.0	6.0	>17.0	25.0	3.0 - 5.0	10 - 30	1.5 x 1.5 x 0.45 DFN-6	Linear mixer for Tx or Rx

* Sampling now, production Q3 2018.

Failsafe SPDT Switch

Part Number	Frequency Range (GHz)	Reference Conditions	Insertion Loss (dB)	Failsafe Loss (dB)	IP1dB (dBm)	IIP3 (dBm)	Vdd Range (V)	Idd (mA)	Package (mm)	Features
GRF6011	0.1 - 3.8	1.9 GHz; 3.3 V (RFC to RF1) (RFC to RF2)	0.45 0.35	23 0.4	32.0 30.5	49.5 51.0	3.0 - 5.0	<1.0	1.5 x 1.5 x 0.45 DFN-6	RF2: Failsafe low loss

Ultra-LNAs™

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVB NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF2051	0.4 - 2.7	1.9 GHz 5.0 V; 70 mA	19.0	0.37	21.0	36.0	2.7 - 5.0	20 - 90	2.0 x 2.0 x 0.5 QFN-12	Flexible bias
GRF2052	1.7 - 4.5	2.5 GHz 5.0 V; 70 mA	19.2	0.50	21.0	38.0	2.7 - 5.0	20 - 90	2.0 x 2.0 x 0.5 QFN-12	Flexible bias
GRF2070	0.4 - 1.5	0.9 GHz 5.0 V; 70 mA	21.2	0.38	20.5	39.0	2.7 - 5.0	20 - 90	2.0 x 2.0 x 0.75 DFN-8	Flexible bias standard pinout
GRF2080	0.4 - 1.5	0.9 GHz 5.0 V; 70 mA	21.2	0.42	18.5	38.5	2.7 - 5.0	35 - 70	2.0 x 2.0 x 0.75 DFN-8	Digital shutdown standard pinout
GRF2071	0.7 - 2.7	1.9 GHz 5.0 V; 60 mA	19.0	0.36	21.0	36.0	2.7 - 5.0	20 - 90	2.0 x 2.0 x 0.75 DFN-8	Flexible Iddq standard pinout
GRF2081	1.4 - 2.7	1.9 GHz 5.0 V; 70 mA	18.5	0.41	19.5	37.5	2.7 - 5.0	35 - 70	2.0 x 2.0 x 0.75 DFN-8	Digital shutdown standard pinout
GRF2072	2.3 - 3.8	2.5 GHz 5.0 V; 70 mA	19.8	0.55	20.0	37.5	2.7 - 5.0	20 - 90	2.0 x 2.0 x 0.75 DFN-8	Flexible Iddq standard pinout
GRF2082	1.9 - 3.8	2.5 GHz 5.0 V; 70 mA	19.0	0.55	20.5	38.0	2.7 - 5.0	35 - 70	2.0 x 2.0 x 0.75 DFN-8	Digital shutdown standard pinout
GRF2073	3.0 - 6.0	3600 MHz 5.0 V; 70 mA	18.6	0.65	18.0	35.0	2.7 - 5.0	20 - 100	2.0 x 2.0 x 0.75 DFN-8	High gain; flexible bias
GRF2083	3.0 - 6.0	3600 MHz 5.0 V; 70 mA	18.6	0.65	18.0	35.0	2.7 - 5.0	20 - 100	2.0 x 2.0 x 0.75 DFN-8	High gain; digital shutdown

Linear PAs/Power-LNAs™

Part Number	Tuning Range (GHz)	Reference Conditions	Gain (dB)	EVB NF (dB)	OP1 dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Package (mm)	Features
GRF5010	0.05 - 6.0	2.5 GHz 8.0 V; 95 mA 5.0 V; 60 mA	17.0 17.0	0.85 0.82	28.5 24.5	45.0 38.5	4.5 - 8.0	50 - 160	3.0 x 3.0 x 0.85 QFN-16	Power/ultra-low noise; flexible bias
GRF5020	0.1 - 6.0	2.5 GHz 8.0 V; 95 mA 5.0 V; 65 mA	18.0 17.3	0.85 0.80	29.0 24.5	43.0 37.2	4.5 - 10.0	50 - 200	3.0 x 3.0 x 0.85 QFN-16	Power/ultra-low noise; flexible bias
GRF5040	0.1 - 3.8	2.5 GHz 10.0 V; 170 mA 8.0 V; 130 mA	15.0 15.0	0.85 0.80	31.0 29.8	47.0 46.3	4.5 - 10.0	100 - 250	3.0 x 3.0 x 0.85 QFN-16	Power/ultra-low noise; flexible bias
GRF5109	0.4 - 1.5	0.83 GHz 5.0 V; 160 mA	19.0	1.30	28.5	43.5	2.7 - 5.0	50 - 200	3.0 x 3.0 x 0.85 QFN-16	5-Volt power/ low noise
GRF5110	1.5 - 3.8	1.9 GHz 5.0 V; 160 mA	15.0	0.90	28.8	46.0	2.7 - 5.0	50 - 200	3.0 x 3.0 x 0.85 QFN-16	5-Volt power/ low noise
GRF5115	0.1 - 2.7	1.9 GHz 5.0 V; 250 mA	15.0	1.40	33.0	45.0	2.7 - 5.0	100 - 300	3.0 x 3.0 x 0.85 QFN-16	5-Volt power/ low noise
GRF5511	1.5 - 6.0	5.5 GHz 8.0 V; 150 mA 5.0 V; 100 mA	15.8 15.4	1.80 1.70	29.5 25.8	47.5 44.0	4.5 - 9.0	50 - 200	3.0 x 3.0 x 0.85 QFN-16	Power/low noise; flexible bias

Guerrilla Bloc™ Technology

Fully Integrated Ultra-Low Noise Amplifier, Driver and PA Modules

- Fully integrated modules with exception of current-setting resistor
- Internally matched to 50 ohms eliminating matching requirement
- Flexible bias voltage and current for optimal efficiency and linearity
- 4.0 x 4.0 x 0.75 mm thermally-efficient, plastic package

Guerrilla Bloc™ Fully Integrated, Low Current and Ultra-Low Noise Modules

Part Number	Frequency Range (GHz)	Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Internally Matched (50 ohms)	Features
GRF2806	0.7 - 1.0	0.9 GHz 5.0 V; 15 mA	20.0	1.05	14.0	25.5	2.7 - 5.0	10 - 30	Yes	Cost-effective gain; low NF
GRF2807	1.6 - 2.5	1.9 GHz 5.0 V; 15 mA	18.2	0.80	13.4	23.0	2.7 - 5.0	10 - 30	Yes	Cost-effective gain; low NF
GRF2870	0.6 - 1.0	0.9 GHz 5.0 V; 70 mA	20.0	0.35	20.0	40.0	2.7 - 5.0	20 - 80	Yes	Ultra-low noise; high gain
GRF2871	1.5 - 2.2	1.9 GHz 5.0 V; 70 mA	19.5	0.40	19.0	37.5	2.7 - 5.0	20 - 80	Yes	Ultra-low noise; high gain
GRF2872	2.0 - 3.0	2.5 GHz 5.0 V; 70 mA	19.0	0.50	21.2	37.5	2.7 - 5.0	20 - 80	Yes	Ultra-low noise; high gain
GRF2873	3.0 - 4.2	3.6 GHz 5.0 V; 70 mA	16.8	0.65	18.8	37.0	2.7 - 5.0	20 - 80	Yes	Ultra-low noise; high gain

Guerrilla Bloc™ Fully Integrated Low Noise PA/Driver Modules

Part Number	Frequency Range (GHz)	Reference Conditions	Gain (dB)	NF (dB)	OP1dB (dBm)	OIP3 (dBm)	Vdd Range (V)	Idd Range (mA)	Internally Matched (50 ohms)	Features
GRF5810*	1.7 - 2.0	1.9 GHz 8.0 V; 130 mA 5.0 V; 100 mA	20.0 20.0	0.90 1.0	27.0 29.5	37.0 42.5	3.3 - 8.0	50 - 160	Yes	Failsafe bypass
GRF5812*	2.3 - 2.7	2.5 GHz 8.0 V; 100 mA 5.0 V; 70 mA	20.2 20.1	0.9 0.9	29.5 27.0	43.0 38.0	3.3 - 8.0	50 - 160	Yes	High power, high gain, low noise
GRF5813*	3.4 - 4.2	3.8 GHz 8.0 V; 130 mA 5.0 V; 100 mA	17.4 17.3	1.2 1.2	29.5 26.0	43.0 38.0	3.3 - 8.0	50 - 160	Yes	High power, high gain, low noise
GRF5814*	4.4 - 5.0	4.7 GHz 8.0 V; 130 mA 5.0 V; 100 mA	16.6 16.5	1.5 1.5	29.5 26.0	46.0 38.5	3.3 - 8.0	50 - 160	Yes	High power, high gain, low noise
GRF5815*	5.0 - 6.0	5.5 GHz 8.0 V; 130 mA 5.0 V; 100 mA	16.1 16.0	1.5 1.5	29.0 25.5	43.5 37.5	3.3 - 8.0	50 - 160	Yes	High power, high gain, low noise

* Pre-production, sampling Q3 2018.

Automotive Qualified (AEC-Q100) Products

Standard and Automotive Product Processes

Process	Standard Products	Automotive Products
Wafer Level and Assembly		
Wafer Automated Optical (Die) Inspection (AOI)	✓	✓
Wafer Process Control Monitor Test (PCM)	✓	✓
Processed in TS16949 Assembly Facility with Standard Flow - Optical Inspection (Sampling)	✓	✓
Reliability Tests.		
Qualification Follows JESD47 Methods	✓	N/A
Qualification Follows Applicable AEC-Q100 Methods, Including Qualification by Similarity	N/A	✓
Final Test, Tape and Reel		
100% RF Functional Test	✓	✓
Vision Inspection	✓	✓

AEC-Q100 Qualification Schedule

Product Qualifications in Progress	2018	
	Q3	Q4
Ultra-Low Noise Amplifier	GRF2073-W	
Broadband Low Noise Amplifier / Linear Driver	GRF4002-W	
High Linearity Gain Block		GRF2012-W

Additional Products Will be Qualified by Family

Part Numbers	Product Family
GRF207X-W	Ultra-Low Noise Amplifiers
GRF208X-W, GRF201X-W	Broadband Linear Gain Blocks
GRF400X-W	Broadband Low Noise Amplifiers / Linear Drivers

Note: -W suffix denotes AEC-Q100 automotive qualified device.

Sales Representatives

North America

USA East

Florida

Brennan Associates
P.O. Box 7159
St. Petersburg, FL 33734
Phone: (727) 446-5006
Email: sales@brennanassoc.net

New York

L-MAR Associates
6800 Pittsford Palmyra Rd., Suite 125
Fairport, NY 14450
Phone: (585) 899-3920
Email: mike.daddis@l-mar.com

Connecticut/Massachusetts/Maine/New Hampshire/ Rhode Island/Vermont

RF Associates, Inc.
430 Boston Rd.
Topsfield, MA 01983
Phone: (978) 887-9762
Email: sales@rfassociates-ne.com

Southern New Jersey/Pennsylvania/Delaware

RF Electronic Sales Company, Inc.
160 Irish Lane Islip
Terrace, NY 11752
Phone: (631) 277-0816
Email: info@rfsales.com

Metro New York/Long Island/Northern New Jersey/ (Fairfield county, CT)

Spectrum Sales Inc.
40 Underhill Blvd., Suite 2M
Syosset, NY 11791
Phone: (516) 921-5750
Email: sales@spectrumsales.com

Alabama/Georgia/Mississippi/Tennessee/ South Carolina/North Carolina

RFM Marketing
3278 Dewey Hogan Rd.
Monroe, GA 30656
Phone: (770) 231-9816
Email: brianjackson1@windstream.net

Maryland/Virginia/West Virginia/District of Columbia

VP Electronics
739 Weller Dr.
Mount Airy, MD 21771
Phone: (410) 961-3663
Email: v3pirro@ix.netcom.com

USA South/Midwest

Texas/Oklahoma/Louisiana/Arkansas

Convergent Technical Sales, Inc.
P.O. Box 325
Colleyville, TX 76034
Phone: (817) 428-3224
Email: info@convergentts.com

Kansas, Minnesota, Missouri, Nebraska, North Dakota and South Dakota

Oak Technical Sales LLC
1043 Grand Ave., Suite 179
Saint Paul, MN 55105
Phone: (612) 840-1651
Email: jsnow@oaktechsales.com

Iowa/Illinois/Ohio

Theta-J Associates
P.O. Box 5670
Vernon Hills, IL 60061
Phone: (847) 549-8820
Email: sales@theta-j.com

USA West

Southern California/Southern Nevada/Hawaii

ACETEC Inc.
6540 Lusk Blvd., Suite C-146
San Diego, CA 92121
Phone: (858) 784-0900
Email: sales@acetec.com

Northern California/Northern Nevada

Cain-White and Co.
4340 Stevens Creek Blvd., Suite 160
San Jose, CA 95129
Phone: (408) 255-3533
Email: sales@cainwhite.com

Sales Representatives (Continued)

Canada

Ottawa, Montreal and Western Canada

Repwave, Inc.
9 Shaughnessy Crescent
Ottawa, ON K2K 2P1
Canada
Phone: (613) 797-5385
Email: fmasciotra@repwave.ca

Toronto, Southwestern Ontario and Western Canada

Repwave, Inc.
1532 Beaty Trail
Milton, ON L9T 5L7
Canada
Phone: (647) 883-7360
Email: claughren@repwave.ca

Europe

France

Wisteria Solutions
10 Rue de Penthièvre
75008 Paris
France
Philippe Roux
Phone: +33 6 98 37 85 25
Email: proux@wisteria-solutions.com

Middle East

Israel

STG International Ltd
Derech Hashalom 53
Givatayim 53454
Israel
Phone: +972 (0) 03-7331456
Email: stg@stggroup.co.il

Distributors

Global Franchises



MOUSER
ELECTRONICS

Mouser Electronics®
1000 North Main St.
Mansfield, TX 76063
Phone: USA 1(800) 346-6873
<http://www.mouser.com/guerrilla-rf>



Richardson RFPD
1950 S. Batavia Ave., Suite 1000
Geneva, IL 60134
Phone: USA 1(603) 262-6800
<http://www.richardsonrfpd/guerrilla-rf>

Part Number Index

GRF201X-W.....	11	GRF2543.....	7
GRF207X-W.....	11	GRF2710.....	7
GRF208X-W.....	11	GRF2806.....	10
GRF400X-W.....	11	GRF2807.....	10
GRF2003.....	6, 7	GRF2870.....	10
GRF2004.....	6, 7	GRF2871.....	10
GRF2012.....	6, 7	GRF2872.....	10
GRF2012-W.....	11	GRF2873.....	10
GRF2013.....	2, 6, 7	GRF3042.....	7
GRF2014.....	6, 7	GRF3044.....	7
GRF2051.....	8	GRF4001.....	4, 6
GRF2052.....	8	GRF4002.....	4, 6
GRF2070.....	8	GRF4002-W.....	11
GRF2071.....	8	GRF4003.....	4, 6
GRF2072.....	8	GRF4004.....	4, 6
GRF2073.....	8	GRF4005.....	4, 6
GRF2073-W.....	11	GRF4014.....	4, 6
GRF2077.....	5	GRF4042.....	5
GRF2080.....	8	GRF4142.....	5, 6
GRF2081.....	8	GRF5010.....	9
GRF2082.....	8	GRF5020.....	9
GRF2083.....	8	GRF5040.....	9
GRF2100.....	5, 6	GRF5109.....	9
GRF2101.....	7	GRF5110.....	9
GRF2105.....	4, 6	GRF5115.....	9
GRF2106.....	5, 6	GRF5511.....	2, 3, 9
GRF2133.....	2, 3, 4, 6	GRF5810.....	10
GRF2140.....	5, 6	GRF5812.....	10
GRF2201.....	7	GRF5813.....	10
GRF2373.....	5, 6	GRF5814.....	10
GRF2374.....	5, 6	GRF5815.....	10
GRF2501.....	7	GRF6011.....	8
GRF2505.....	6, 7	GRF7001.....	2, 8
GRF2541.....	7		

©2018 Guerrilla RF, Inc. All rights reserved.

This document, including the information contained in it, is provided by Guerrilla RF as a service to its customers and may be used for informational purposes only by the customer. Guerrilla RF assumes no responsibility for errors or omissions in this document or the information contained herein. Information provided is believed to be accurate and reliable, however, no responsibility is assumed by Guerrilla RF for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. Guerrilla RF assumes no liability for any product information, or other information provided hereunder, including the sale, distribution, reproduction or use of Guerrilla RF products, information or materials.

No license, whether express, implied, by estoppel, by implication or otherwise is granted by this document for any intellectual property of Guerrilla RF, or any third party, including without limitation, patents, patent rights, copyrights, trademarks and trade secrets. All rights are reserved by Guerrilla RF.

All information herein, products, product information, datasheets, and datasheet information are subject to change and availability without notice. Guerrilla RF reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice. Guerrilla RF may further change its datasheet, product information, documentation, products, services, specifications or product descriptions at any time, without notice. Guerrilla RF makes no commitment to update any materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

GUERRILLA RF INFORMATION, PRODUCTS, PRODUCT INFORMATION, DATASHEETS AND DATASHEET INFORMATION ARE PROVIDED "AS IS" AND WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. GUERRILLA RF DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. GUERRILLA RF SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are solely responsible for their use of Guerrilla RF products in the Customer's products and applications or in ways which deviate from Guerrilla RF's published specifications, either intentionally or as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Guerrilla RF assumes no liability or responsibility for applications assistance, customer product design, or damage to any equipment resulting from the use of Guerrilla RF products outside of stated published specifications or parameters.



Making Better Networks

Guerrilla RF's high-performance RF and Microwave IC products enable greater coverage areas and higher data rates for wireless networks. Focused on a wide variety of infrastructure and general market applications, our unique products utilize our patented Guerrilla Armor technology, expert IC design talents, cutting-edge device technologies and high-capacity supply chain to deliver superior performance. Our team of industry veterans are committed to providing detailed, custom applications support through all stages of your product design process from initial prototyping through mass production. Please see the Guerrilla RF website for all the latest product information at: www.guerrilla-rf.com

CONTACT US



1196 Pleasant Ridge Road
Suite 5
Greensboro, NC 27409



336.510.7840



sales@guerrilla-rf.com



www.guerrilla-rf.com

Subscribe

to Guerrilla RF News

Sign up today to receive Guerrilla RF product and industry updates to your inbox. Be in-the-know about our newest opportunities, insights, industry tips and trends affecting your business. Unsubscribe at any time.